




WSM-5061VA Metallic Wall Loudspeaker

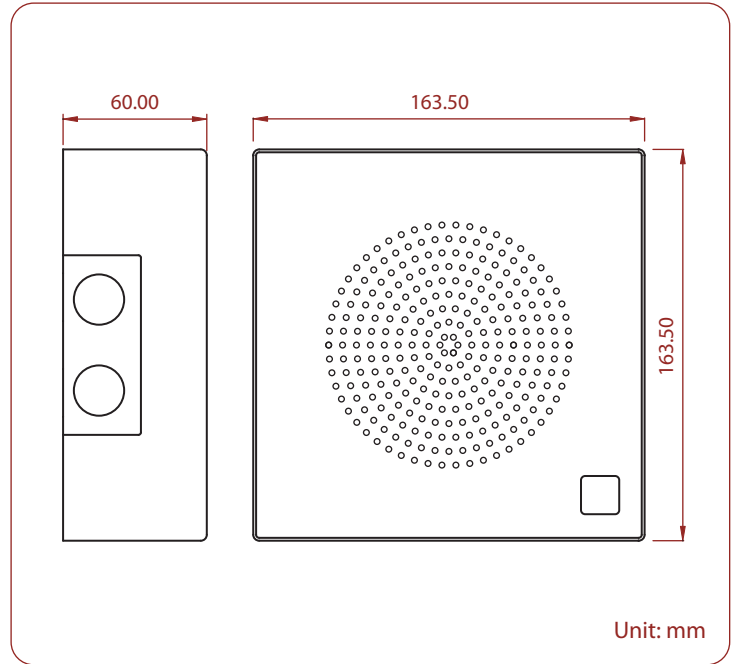

- 100 Hours Life Tested
- CE Certified (EMC & LVD)
- IP Rated
- Rustproof
- UL94V0
- BS 5839 Part 8
- EASE Data
- RoHS Compliance
- UV Protected
- Withstanding/Insulation Tested

Multi purpose wall cabinet loudspeaker, designed to be vandal-proof as well as compliant with voice alarm standards world-wide. Ideal for environments such as schools, public buildings, car parks, offices etc.

- Compliant to BS5839 part 8. (British standards for voice alarm systems).
- Rugged powder-coat steel construction.
- Twin ceramic termination blocks and fire resistant internal cabling.
- 150°C thermal circuit isolating fuse.
- Twin 20mm gland entry / exit points.
- Two fix install system.

Model No.	WSM-5061VA
Rated Power (rms)	6W
Impedance	1.67kΩ, 3.33kΩ, 6.67kΩ & 13.33kΩ
Power Taps @ 100V	6W, 3W, 1.5W & 0.75W
Power Taps @ 70V	3W, 1.5W, 0.75W & 0.375W
SPL (1W / 1M)	91 dB
Max. SPL (Rated 6W / 1M)	98 dB
Frequency Range (-10dB)	150 Hz ~ 18K Hz
Dispersion 1K Hz / 4K Hz	170° / 70°
Ambient Temperature	-35°C ~ +70°C
Power Selection	Plug
Material	Housing: Steel
Colour / Finish	White (RAL 9010)
Dimensions	163.5 (6.44) X 163.5 (6.44) X 60 (2.36) mm. (in.)
Net Weight (ea)	2.0 kgs (4.41 lbs)
Mounting	Screw

FREUND ELEKTRONIK A/S